

Technical Data Sheet

F 1055 REV A

CONTAINER TANK – CT30

The standard CT30 self bunded container tank from Tank Solutions offers all the features you need in a portable diesel fuel container tank with the added benefit of being supplied by an Australian based ISO9001 compliant company. This provides control over the total manufacturing process ensures an attention to build quality and compliance to AS1940 and AS1992 that is sometimes missing in imported container tanks. You can be assured that the welding quality and standard of painting for the CT30 are in conformance with Australian Standards.

CONTAINER TANK FEATURES

The CT30 tank has a front pump bay with lockable doors that can accommodate the fitment of a full range of options for diesel fuel dispensing equipment to suit your particular requirements. Further benefits offered which are generally not available in other imported container tanks are-

- a sloping inner tank floor to allow for easy condensation removal – this protects the longevity of the tank and improves fuel quality
- Provision of a mechanical overfill valve as standard to ensure your facility and local environment is not contaminated from spills caused by negligent deliverymen

The dispensing equipment can be customised for different pump configurations, dispensing rates, fuel management and monitoring systems. This equipment can be fitted by your choice of an accredited installer or contractor on or offsite.


A standard of consistent quality:

- Design to:
 - AS 1692
 - Self Bunded AS 1940
 - AS 1657

COMPANY FEATURES

- Australian owned and operated
- Application and installation technical support
- Extensive manufacturing experience
- Full range of optional equipment and accessories to suit the complete project

DIMENSIONS AND CAPACITIES

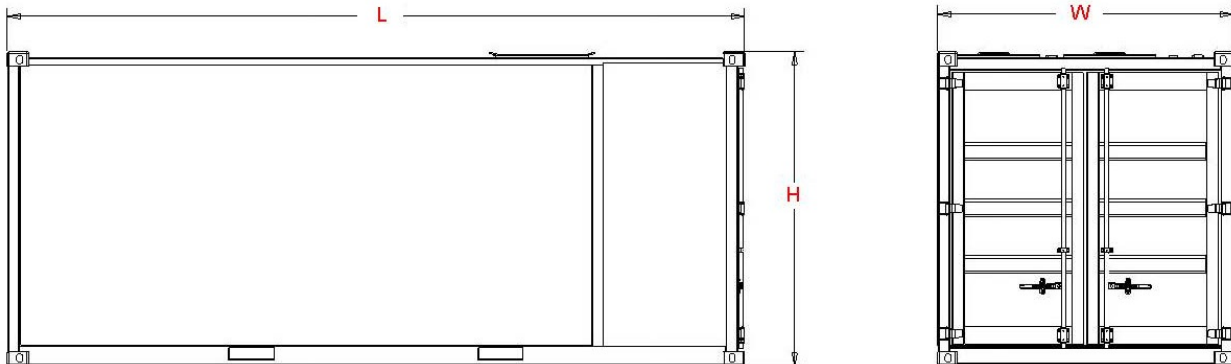

Type	Nominal Capacity Litres	Actual Capacity Litres	Dimensions – Millimetres				Weight kg
			L (mm)	W (mm)	H (mm)	SFL	
						Ltrs	
30	30,000	29,500	6,059	2,438	2,896	28,600	9,500

Weights, Capacities & Dimensions are nominal only

The CT30 includes as standard:

- Fill point / Discharge pipework with flanged connections.
- Provision for the fitment of a Submersible Turbine Pump.
- Venting for both tank and interstitial space
- Access Ladder and platform in conformance with Australian standards
- Calibrated Dipstick.
- Mechanical Overfill Protection Valve / Electronic Overfill Alarm.
- Anti- Syphon Valve
- 600mm diameter manway access

The TS-CT30 tank is a “stocked” item. A range of other sized container tanks are available from Tank Solutions upon request.

Tank Solutions Pty Ltd

ABN 59 142 807 949

e sales@tanksolutions.com.au w www.tanksolutions.com.au

New South Wales: 513 Tomago Road, Tomago, NSW 2322. PO Box 623, Raymond Terrace, NSW 2324. p 61 2 4964 8270 f 61 2 4964 8522

Queensland: Unit 3, 40 Ingleston Road, Wakerly, Qld 4154. p 61 7 3390 4800 f 61 7 3390 4667